

Hydrology and Water Resource Systems Analysis

MARIA A. MIMIKOU
EVANGELOS A. BALTAS
VASSILIOS A. TSIHRINTZIS

มหาวิทยาลัยเทคโนโลยีราชมงคลธัญบุรี
ก่อจัตุรัศมีพงษ์



502006138



CRC Press
Taylor & Francis Group

Contents

| | |
|---|-----------|
| <i>Preface</i> | xv |
| <i>Authors</i> | xvii |
| 1 Introduction | 1 |
| 1.1 General | 1 |
| 1.2 The Science of hydrology | 2 |
| 1.3 Historical evolution of hydrology | 3 |
| 1.4 Classification of hydrology | 3 |
| 1.5 Hydrological cycle | 4 |
| 1.6 Hydrological variables and their units of measurement | 5 |
| 1.7 River basin | 6 |
| 1.8 Scale in hydrology | 6 |
| 1.8.1 Spatial scale | 7 |
| 1.8.2 Timescale | 7 |
| 1.9 Worldwide distribution of water | 8 |
| 1.10 Hydrological balance | 9 |
| References | 17 |
| 2 Precipitation and hydrological losses | 19 |
| 2.1 General | 19 |
| 2.2 Formation of atmospheric precipitation | 19 |
| 2.3 Precipitation types | 21 |
| 2.3.1 Rain | 21 |
| 2.3.2 Snow | 22 |
| 2.3.3 Hail | 22 |
| 2.4 Cooling mechanisms and types of precipitation | 23 |
| 2.4.1 Cyclonic cooling | 23 |
| 2.4.2 Orographic cooling | 23 |
| 2.4.3 Conductive cooling | 23 |

| | | |
|----------|---|----|
| 2.5 | <i>Measurement of precipitation</i> | 24 |
| 2.5.1 | <i>Precipitation sensors</i> | 24 |
| 2.5.2 | <i>Rain gauge recorders</i> | 25 |
| 2.5.3 | <i>Snowfall measurement</i> | 26 |
| 2.5.4 | <i>Meteorological radar</i> | 26 |
| 2.5.5 | <i>Joss-Waldvogel disdrometers</i> | 28 |
| 2.5.5.1 | <i>Description of the disdrometer RD-80</i> | 29 |
| 2.5.5.2 | <i>Hydro-meteorological parameters which can be derived by the RD-69 and RD-80 disdrometers</i> | 29 |
| 2.5.5.3 | <i>Derivation of rain characteristics with the use of a Joss-Waldvogel RD-69 disdrometer</i> | 30 |
| 2.5.6 | <i>Installation of rain gauges</i> | 38 |
| 2.5.7 | <i>Space measurements</i> | 40 |
| 2.5.7.1 | <i>Satellites</i> | 40 |
| 2.5.7.2 | <i>Installed instruments</i> | 44 |
| 2.5.7.3 | <i>Advanced precipitation radar</i> | 45 |
| 2.5.7.4 | <i>Microwave imager</i> | 48 |
| 2.5.7.5 | <i>Visible and infrared radiation scanner</i> | 48 |
| 2.5.7.6 | <i>Clouds and the Earth's radiant energy system</i> | 49 |
| 2.5.7.7 | <i>Lightning imaging sensor</i> | 49 |
| 2.6 | <i>Installation of network of point measurement devices</i> | 49 |
| 2.7 | <i>Test of data homogeneity and analysis of double cumulative curves</i> | 51 |
| 2.8 | <i>Completion of rainfall measurements; Adaptation to different altitudes</i> | 53 |
| 2.8.1 | <i>Method of arithmetic mean</i> | 57 |
| 2.8.2 | <i>Method of normal ratios</i> | 57 |
| 2.8.3 | <i>Inverse distance method</i> | 57 |
| 2.8.4 | <i>Correlation and regression</i> | 58 |
| 2.8.5 | <i>Correction of rainfall with altitude</i> | 62 |
| 2.9 | <i>Surface integration of areal rainfall from point measurements</i> | 62 |
| 2.9.1 | <i>Averaging method</i> | 63 |
| 2.9.2 | <i>Thiessen method</i> | 63 |
| 2.9.3 | <i>Isohyetal curve method</i> | 64 |
| 2.9.4 | <i>Optimum interpolation method (Kriging)</i> | 70 |
| 2.9.5 | <i>Time distributions of rainfall</i> | 72 |
| 2.9.5.1 | <i>Limited-scale phenomena</i> | 72 |
| 2.9.5.2 | <i>Medium-scale phenomena</i> | 72 |
| 2.9.5.3 | <i>Synoptic-scale phenomena</i> | 73 |
| 2.10 | <i>Hydrological losses</i> | 74 |
| 2.10.1 | <i>General</i> | 74 |
| 2.11 | <i>Evaporation</i> | 77 |
| 2.11.1 | <i>Water balance methods</i> | 77 |
| 2.11.1.1 | <i>Thorntwaite's water balance method</i> | 78 |
| 2.11.2 | <i>Energy balance methods</i> | 78 |
| 2.11.3 | <i>Mass transfer methods</i> | 79 |
| 2.11.4 | <i>Combination methods: Penman method</i> | 80 |

| | | |
|-------------------|---|----|
| 2.12 | <i>Evapotranspiration</i> | 81 |
| 2.12.1 | <i>Water balance methods</i> | 81 |
| 2.12.2 | <i>Methods for the determination of potential evapotranspiration from climatic data</i> | 81 |
| 2.12.2.1 | <i>Penman–Monteith method</i> | 81 |
| 2.12.2.2 | <i>Thornthwaite's method</i> | 82 |
| 2.12.2.3 | <i>Blaney–Criddle method</i> | 84 |
| 2.12.2.4 | <i>Jensen–Haise method</i> | 86 |
| 2.12.2.5 | <i>Makkink's method</i> | 86 |
| 2.12.2.6 | <i>Hargreaves method</i> | 87 |
| 2.12.2.7 | <i>Priestley–Taylor method</i> | 87 |
| 2.12.3 | <i>Methods for the determination of actual evapotranspiration</i> | 90 |
| 2.12.3.1 | <i>Turc method</i> | 91 |
| 2.12.3.2 | <i>Coutagne method</i> | 92 |
| 2.13 | <i>Infiltration rate estimation</i> | 93 |
| 2.13.1 | <i>Infiltration</i> | 93 |
| 2.13.2 | <i>Horton's model</i> | 94 |
| 2.13.3 | <i>Green–Ampt model</i> | 95 |
| 2.13.4 | <i>Huggins–Monke model</i> | 96 |
| 2.13.5 | <i>Holtan model</i> | 96 |
| 2.13.6 | <i>Kostiakov model</i> | 96 |
| 2.13.7 | <i>Philip model</i> | 97 |
| 2.13.8 | <i>Soil Conservation Service method</i> | 97 |
| <i>References</i> | | 98 |

| | | |
|---------|---|-----|
| 3 | Runoff | 101 |
| 3.1 | <i>General</i> | 101 |
| 3.2 | <i>River basin</i> | 101 |
| 3.3 | <i>Hydrographs</i> | 105 |
| 3.3.1 | <i>Characteristics of the hydrograph</i> | 105 |
| 3.3.1.1 | φ index | 108 |
| 3.3.2 | <i>Hydrograph separation</i> | 110 |
| 3.3.2.1 | <i>Methods of baseflow separation from the total hydrograph</i> | 111 |
| 3.3.2.2 | <i>Hydrograph separation with the method of the logarithms</i> | 112 |
| 3.3.3 | <i>Composite hydrograph separation</i> | 115 |
| 3.3.4 | <i>Factors influencing the hydrograph shape</i> | 116 |
| 3.3.4.1 | <i>Climatic factors</i> | 116 |
| 3.3.4.2 | <i>Topographic factors</i> | 119 |
| 3.3.4.3 | <i>Geological factors</i> | 121 |
| 3.4 | <i>Hydrometry</i> | 122 |
| 3.4.1 | <i>Installation criteria for a hydrometric station</i> | 122 |
| 3.4.2 | <i>Measurement of water-level</i> | 123 |
| 3.4.3 | <i>Discharge measurement by the method of velocity field</i> | 124 |

| | | |
|---------|---|-----|
| 3.5 | <i>Discharge estimation using hydrometric data</i> | 127 |
| 3.5.1 | <i>Preparation of a rating curve</i> | 127 |
| 3.5.2 | <i>Extension of the rating curve</i> | 129 |
| 3.5.3 | <i>Remarks on the rating curves</i> | 130 |
| 3.5.4 | <i>Estimation of an average water-level for a specific time step</i> | 131 |
| 3.5.5 | <i>Flow estimation from measurements of water-level meters/recorders</i> | 131 |
| 3.6 | <i>Rainfall-runoff relationships: Empirical methods</i> | 135 |
| 3.6.1 | <i>Rational method for estimating flood peaks</i> | 135 |
| 3.6.2 | <i>Other empirical methods for calculating peak runoff</i> | 138 |
| 3.7 | <i>Rainfall-runoff relationships: The UH</i> | 139 |
| 3.7.1 | <i>Basic assumptions of UH</i> | 139 |
| 3.7.1.1 | <i>Principle of proportionality</i> | 140 |
| 3.7.1.2 | <i>Principle of superposition</i> | 140 |
| 3.7.2 | <i>Derivation of the UH from a single rainfall event</i> | 140 |
| 3.7.3 | <i>Mathematical determination of the UH of composite rainfall</i> | 142 |
| 3.7.4 | <i>Determination of UH of a certain duration from known UH of a different duration: S-curve</i> | 145 |
| 3.7.5 | <i>Estimation of flood hydrograph using the UH</i> | 149 |
| 3.7.6 | <i>Synthetic UHs</i> | 151 |
| 3.7.6.1 | <i>Snyder's UH</i> | 151 |
| 3.7.6.2 | <i>SCS dimensionless hydrograph method</i> | 154 |
| 3.7.6.3 | <i>Triangular SCS hydrograph method</i> | 154 |
| 3.7.7 | <i>Instantaneous UH</i> | 155 |
| 3.7.7.1 | <i>By an S-curve</i> | 155 |
| 3.7.7.2 | <i>By using a convolution integral</i> | 155 |
| 3.7.7.3 | <i>By the use of various conceptual models</i> | 156 |
| 3.7.7.4 | <i>Routing time-area curve of basins</i> | 156 |
| 3.7.8 | <i>CEH-UK: Revitalized flood hydrograph</i> | 156 |
| 3.7.9 | <i>Shortcomings of the UH and the UH-based models</i> | 158 |
| 3.7.10 | <i>General overview of hydrological models: Specific rainfall-runoff models</i> | 159 |
| 3.8 | <i>Case study using the HEC-HMS hydrological model</i> | 160 |
| 3.8.1 | <i>General information for HEC-HMS</i> | 160 |
| 3.8.1.1 | <i>Components of HEC-HMS</i> | 160 |
| 3.8.2 | <i>Case study</i> | 164 |
| 3.8.2.1 | <i>Study area</i> | 164 |
| 3.8.2.2 | <i>HEC-HMS environment</i> | 165 |
| | <i>References</i> | 170 |

4 Probability and statistics in hydrology

| | | |
|-------|---|-----|
| 4.1 | <i>General concepts and definitions</i> | 173 |
| 4.1.1 | <i>Experiments and sample spaces</i> | 174 |
| 4.1.2 | <i>Probability function</i> | 176 |

| | | |
|---------|--|-----|
| 4.1.3 | <i>Conditional probability</i> | 176 |
| 4.1.4 | <i>Total probability and Bayes' theorem</i> | 177 |
| 4.2 | <i>Random variable</i> | 179 |
| 4.3 | <i>Distributions</i> | 184 |
| 4.3.1 | <i>Normal distribution</i> | 184 |
| 4.3.2 | <i>Log-normal distribution</i> | 188 |
| 4.4 | <i>Some important discrete distributions</i> | 190 |
| 4.4.1 | <i>Bernoulli trials and the Bernoulli distribution</i> | 190 |
| 4.4.2 | <i>Binomial distribution</i> | 190 |
| 4.4.3 | <i>Geometric distribution</i> | 191 |
| 4.4.4 | <i>Poisson distribution</i> | 191 |
| 4.4.5 | <i>Uniform distribution</i> | 192 |
| 4.5 | <i>Some important continuous distributions</i> | 193 |
| 4.5.1 | <i>Uniform distribution</i> | 193 |
| 4.5.2 | <i>Exponential distribution</i> | 193 |
| 4.5.3 | <i>Gamma distribution</i> | 193 |
| 4.5.3.1 | <i>Gamma distribution of three parameters (Pearson type III)</i> | 195 |
| 4.5.4 | <i>Log-Pearson distribution</i> | 195 |
| 4.6 | <i>Statistical analysis of extremes</i> | 196 |
| 4.6.1 | <i>Point frequency analysis</i> | 197 |
| 4.6.1.1 | <i>Graphical method</i> | 197 |
| 4.6.1.2 | <i>Method of frequency factor</i> | 197 |
| 4.6.2 | <i>Gumbel maximum distribution</i> | 198 |
| 4.6.3 | <i>Gumbel minimum distribution</i> | 199 |
| 4.6.4 | <i>Weibull distribution</i> | 200 |
| 4.7 | <i>Testing of the distributions</i> | 202 |
| 4.7.1 | <i>Test X^2</i> | 202 |
| 4.7.2 | <i>Kolmogorov-Smirnov test for the appropriateness of a distribution</i> | 202 |
| 4.8 | <i>Intensity-duration-frequency curves</i> | 215 |
| 4.8.1 | <i>Construction of the idf curves</i> | 217 |
| | <i>References</i> | 222 |
| 5 | Groundwater hydrology | 223 |
| 5.1 | <i>General</i> | 223 |
| 5.2 | <i>Soil and aquifer parameters</i> | 224 |
| 5.3 | <i>Classification of aquifers</i> | 226 |
| 5.4 | <i>Field measurements</i> | 228 |
| 5.5 | <i>Mathematical problem of groundwater</i> | 229 |
| 5.6 | <i>General expression of groundwater flow</i> | 230 |
| 5.7 | <i>Analytical solutions of steady flow</i> | 232 |
| 5.7.1 | <i>Confined aquifer</i> | 232 |
| 5.7.2 | <i>Unconfined aquifer</i> | 235 |
| 5.7.3 | <i>Semi-confined aquifer</i> | 237 |

| | | |
|---------|---|-----|
| 5.8 | <i>Theory of images</i> | 239 |
| 5.8.1 | <i>Well near river</i> | 240 |
| 5.8.2 | <i>Well near impermeable boundaries</i> | 242 |
| 5.9 | <i>Analytical solutions of non-uniform flow</i> | 243 |
| 5.9.1 | <i>Well hydraulics</i> | 243 |
| 5.9.2 | <i>Processing of drawdown tests</i> | 247 |
| 5.9.3 | <i>Analysis of confined aquifers</i> | 247 |
| 5.9.3.1 | <i>Theis method</i> | 247 |
| 5.9.3.2 | <i>Cooper-Jacob method</i> | 248 |
| 5.9.3.3 | <i>Chow method</i> | 251 |
| 5.9.4 | <i>Analysis of unconfined aquifers</i> | 257 |
| 5.9.5 | <i>Anisotropic alluvial deposits</i> | 260 |
| 5.10 | <i>Well losses</i> | 261 |
| 5.11 | <i>Aquifer recharge</i> | 263 |
| 5.12 | <i>Salinization</i> | 264 |
| 5.12.1 | <i>Interface of saltwater and freshwater</i> | 264 |
| 5.12.2 | <i>Saltwater elevation cone</i> | 265 |
| | <i>References</i> | 266 |

6 Hydrologic design

267

| | | |
|--------|---|-----|
| 6.1 | <i>Introduction</i> | 267 |
| 6.2 | <i>Sizing of reservoirs</i> | 267 |
| 6.2.1 | <i>General</i> | 267 |
| 6.2.2 | <i>Sections of volume and reservoir exploitation</i> | 268 |
| 6.3 | <i>Conventional method of sizing the active reservoir volume</i> | 269 |
| 6.3.1 | <i>Construction of a cumulative inflow curve</i> | 270 |
| 6.3.2 | <i>Estimation of the active reservoir volume</i> | 270 |
| 6.3.3 | <i>Disadvantages of Rippl's conventional design</i> | 271 |
| 6.3.4 | <i>Sequent peak analysis method</i> | 272 |
| 6.3.5 | <i>Non-conventional stochastic methods of reservoir sizing</i> | 273 |
| 6.3.6 | <i>Synthetic data of inflows and their cumulative curves</i> | 277 |
| 6.3.7 | <i>Design risk: Estimation of volume based on acceptable risk</i> | 278 |
| 6.3.8 | <i>Advantages of the non-conventional sizing method</i> | 279 |
| 6.3.9 | <i>Sensitivity of the reservoir design on the mechanism of synthetic discharge generation</i> | 279 |
| 6.3.10 | <i>Non-conventional method of sizing including the persistence in inflows</i> | 286 |
| 6.3.11 | <i>Sizing of a reservoir with a spillway with the use of the method of maximum shortage</i> | 288 |
| 6.4 | <i>Sizing of a reservoir in a river site without measurements</i> | 290 |
| 6.4.1 | <i>Regional hydrologic models</i> | 290 |
| 6.4.2 | <i>Regional model for the derivation of monthly inflows</i> | 291 |
| 6.5 | <i>Sizing of the dead reservoir volume</i> | 292 |
| 6.5.1 | <i>General</i> | 292 |
| 6.5.2 | <i>Sedimentation in a reservoir: Definition of dead storage</i> | 293 |

| | | |
|---------|---|-----|
| 6.5.3 | <i>Estimation of dead volume</i> | 294 |
| 6.5.4 | <i>Estimation of active volume loss due to reservoir sedimentation</i> | 296 |
| 6.6 | <i>Sizing of the reservoir's flood volume</i> | 302 |
| 6.7 | <i>Hydrologic design of flood safety (protection) structures</i> | 302 |
| 6.7.1 | <i>Spillway hydrologic design</i> | 303 |
| 6.7.2 | <i>Spillway design flood</i> | 304 |
| 6.7.3 | <i>Criteria of spillway design</i> | 305 |
| 6.7.4 | <i>Probable maximum flood (PMF)</i> | 306 |
| 6.7.5 | <i>Estimation of the design storm and flood</i> | 306 |
| 6.7.6 | <i>Derivation of flood hydrograph in specific cases</i> | 307 |
| 6.8 | <i>Hydrologic design of a river diversion</i> | 315 |
| 6.8.1 | <i>Introduction</i> | 315 |
| 6.8.2 | <i>Design criteria of a diversion</i> | 317 |
| 6.8.3 | <i>Estimation of the design flood of diversion</i> | 318 |
| 6.9 | <i>Hydrologic design of other water structure-specific issues</i> | 319 |
| 6.9.1 | <i>General</i> | 319 |
| 6.9.2 | <i>Construction of operational depth-duration-frequency curves of rainfall for irrigation needs</i> | 320 |
| 6.9.3 | <i>Discharge prediction in a water recipient of outflows from a wastewater treatment plant</i> | 322 |
| 6.9.3.1 | <i>Conditions and requirements of the method</i> | 322 |
| 6.9.4 | <i>Models of discharge predictions of water recipient of sewage</i> | 323 |
| 6.9.5 | <i>Duration-discharge curves and their use in the estimation of the hydroenergy potential</i> | 327 |
| | <i>References</i> | 328 |

7 Urban hydrology and stormwater management 331

| | | |
|-------|--|-----|
| 7.1 | <i>Introduction</i> | 331 |
| 7.1.1 | <i>Definitions of urban hydrology and stormwater management</i> | 331 |
| 7.1.2 | <i>History</i> | 332 |
| 7.1.3 | <i>Description of the urban stormwater drainage system</i> | 333 |
| 7.1.4 | <i>Impacts of urbanization</i> | 334 |
| 7.1.5 | <i>Factors influencing urban runoff quality</i> | 336 |
| 7.1.6 | <i>Pollutant generation processes</i> | 337 |
| 7.1.7 | <i>Types and sources of pollutants</i> | 337 |
| 7.1.8 | <i>Impacts to the receiving waters</i> | 338 |
| 7.2 | <i>Urban runoff quantity computations</i> | 339 |
| 7.2.1 | <i>Rational method</i> | 339 |
| 7.2.2 | <i>SCS method</i> | 345 |
| 7.3 | <i>Urban runoff quality computations</i> | 354 |
| 7.3.1 | <i>USEPA method for the prediction of annual unit pollutant loadings</i> | 354 |
| 7.3.2 | <i>USGS method for the prediction of mean annual pollutant quantity</i> | 356 |
| 7.3.3 | <i>Simple method of Washington, DC</i> | 356 |
| 7.3.4 | <i>Pollutant accumulation on street surface</i> | 359 |
| 7.3.5 | <i>Washoff of accumulated pollutants</i> | 361 |

| | | |
|-------------------|---|-----|
| 7.4 | <i>Surface runoff quantity and quality management</i> | 363 |
| 7.4.1 | <i>General</i> | 363 |
| 7.4.2 | <i>Pollution control at the source</i> | 366 |
| 7.4.3 | <i>Pollution control in the sewer and the drainage ditches</i> | 376 |
| 7.4.4 | <i>Pollution control with surface detention/retention and storage</i> | 384 |
| 7.4.5 | <i>Runoff treatment</i> | 394 |
| <i>References</i> | | 396 |
| 8 | Sediment transport and erosion | 401 |
| 8.1 | <i>Introduction</i> | 401 |
| 8.2 | <i>Properties of sediment</i> | 402 |
| 8.2.1 | <i>Size and shape</i> | 402 |
| 8.2.2 | <i>Density, specific weight and specific gravity</i> | 404 |
| 8.2.3 | <i>Fall velocity</i> | 404 |
| 8.3 | <i>Flow resistance</i> | 405 |
| 8.3.1 | <i>Channel flow resistance</i> | 405 |
| 8.3.2 | <i>Flow resistance in alluvial streams and rivers</i> | 409 |
| 8.4 | <i>Incipient motion</i> | 419 |
| 8.5 | <i>Sediment transport formulas</i> | 421 |
| 8.5.1 | <i>Bed load</i> | 424 |
| 8.5.1.1 | <i>Meyer-Peter and Müller method</i> | 424 |
| 8.5.1.2 | <i>Einstein method</i> | 425 |
| 8.5.1.3 | <i>Einstein-Brown method</i> | 428 |
| 8.5.2 | <i>Suspended load</i> | 429 |
| 8.5.3 | <i>Total sediment load</i> | 431 |
| 8.5.3.1 | <i>Einstein method</i> | 431 |
| 8.5.3.2 | <i>Ackers and White method</i> | 432 |
| 8.5.3.3 | <i>Yang's method</i> | 434 |
| 8.6 | <i>Land erosion and watershed sediment yield</i> | 434 |
| 8.6.1 | <i>Introduction</i> | 434 |
| 8.6.2 | <i>Universal soil loss equation (USLE)</i> | 435 |
| 8.6.2.1 | <i>Rainfall erosivity factor R</i> | 436 |
| 8.6.2.2 | <i>Soil erodibility factor K</i> | 436 |
| 8.6.2.3 | <i>Slope length and steepness factor LS</i> | 438 |
| 8.6.2.4 | <i>Vegetative cover and cropping management factor C</i> | 439 |
| 8.6.2.5 | <i>Erosion control practices factor P</i> | 440 |
| 8.6.3 | <i>Modified universal soil loss equation</i> | 442 |
| 8.6.4 | <i>Erosion control measures</i> | 442 |
| 8.6.4.1 | <i>Erosion control at the source</i> | 442 |
| 8.6.4.2 | <i>Structural measures to control erosion</i> | 445 |
| <i>References</i> | | 447 |
| <i>Index</i> | | 449 |

สามารถถ่ายและติดตามหนังสือใหม่ได้ที่ ระบบห้องสมุดอัตโนมัติ Walai Autolib


<https://lib.rmutp.ac.th/bibitem?bibid=b00108225>



Hydrology and water resource systems analysis / Maria A. Mimikou, Evangelos A. Baltas and Vassilios A. Tsirhrintzis.

Mimikou, Maria A.

My list

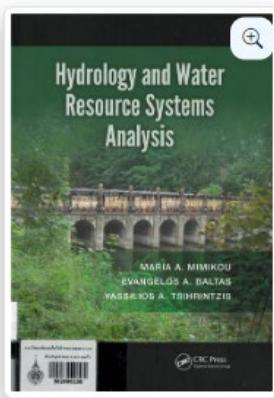

Subject

[System analysis](#),
[Water resources development](#),
[Hydrology](#).

Details

Added Author

[Baltas, Evangelos A.](#),
[Tsirhrintzis, Vassilios A.](#)

Published

CRC Press : Boca Raton, c2018.

Edition

1st ed, Kindle Edition.

Detail

xviii, 459 p. : ill ; 25 cm.

ISBN

9780367028015

0 26 0

MARC

Export

Save

Share